



2-POST Open Frame Rack Assembly Instruction

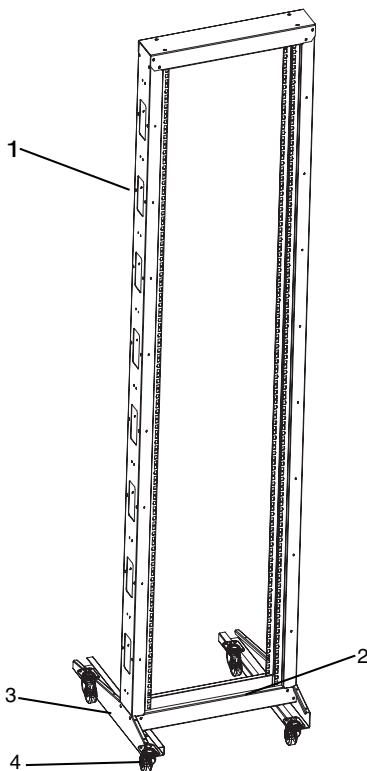


Packaging List

- 1. Vertical rail - 2pcs
- 2. Horizontal beam - 2pcs
- 3. Plinth - 2pcs
- 4. 2" heavy-duty castor (2 with brake) - 4pcs


Dimensions

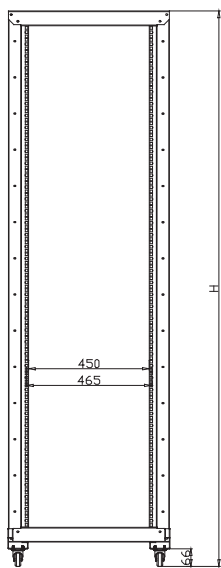

Front View

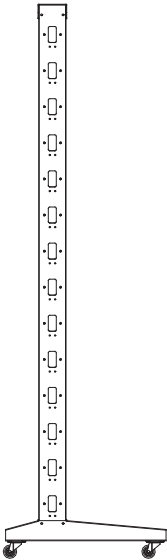

Side View



Top View

Item List of Accessories Packaging

Assembly Hardwares Kits:






- M6*12 screw - 40pcs
- M6 Flange nut - 40pcs
- 2" heavy-duty castor -2pcs
- 2" heavy-duty castor with brake -2pcs

End User Hardwares Kits:


U Capacity $\leq 27U$, 20 sets cagenuts ; $27U < U$ Capacity $\leq 37U$, 30sets cagenuts ; U Capacity $> 37U$, 40 sets cagenuts.
(cagenut : M6*12 screw & M6 cage nut)

Tips: Check the quantities of the items before assembly


Diagram of accessories

| NO. | FIGURE | DESCRIPTION |
|-----|---|---------------------------------|
| 1 |  | M6 flange nut |
| 2 |  | M6*12 Screw |
| 3 |  | 2" heavy-duty castor |
| 4 |  | 2" heavy-duty castor with brake |
| 5 |  | M6 cage nut |


Installation

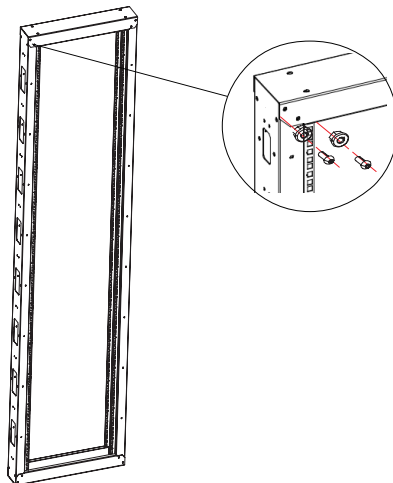

Step 1: Assembly vertical rails and horizontal beams to form the frame with 16 sets M6*12 screws and M6 flange nuts.

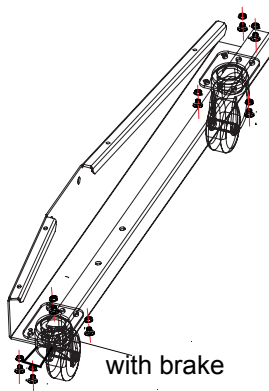

Step 2: Assembly the castors on the Plinths by 16 sets M6*12 screws and M6 flange nuts.

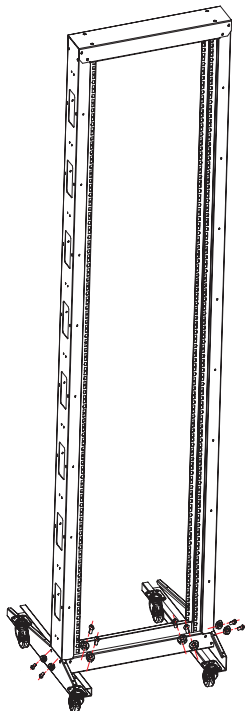

Step 3: Assembly the frame and plinth by 8 sets M6*12 screws and M6 flange nuts.

Note: After assembly, please adjust the diagonal size of the cabinet to ensure homogeneous space for all doors and all doors work well.