


PRE-TERMINATED FIBRE CABLE ORDER FORM

MSS Data Solutions can manufacture a large range of pre-terminated fibre cables to suit your specific application requirements. From straight forward patch cords to custom military spec cable, MSS Data Solutions has the resources and expertise to deliver a quality product with short lead time and friendly customer service.

Features

- Fully tested and ready to be installed
- Manufactured to required length, colour & connector type
- Pulling conduit assemblies available
- Custom labelling
- Cable drum for re-deployment
- Tested to AS/NZS3080, ISO 110801 Performance Standards
- Cables provided with a test report
- ACMA Compliant: N15531

Ordering Details

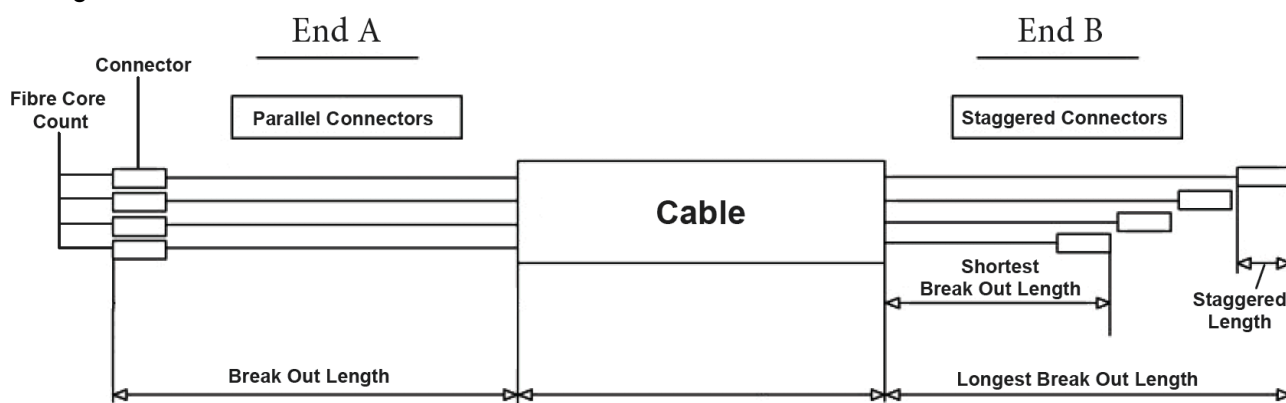

END A

Connector Type:

- | | |
|------------------------------|------------------------------|
| <input type="checkbox"/> ST | <input type="checkbox"/> FCA |
| <input type="checkbox"/> SC | <input type="checkbox"/> LC |
| <input type="checkbox"/> SCA | <input type="checkbox"/> LCA |
| <input type="checkbox"/> FC | |

Break Out Details:

- ☐ Staggered
☐ Parallel
☐ Over sleeving 1.8mm
☐ Over sleeving 3mm

*see diagram above

CABLE

Fibre Mode:

- ☐ Singlemode 9/125
☐ OM1 - Multimode 62.5/125
☐ OM3 - Multimode 50/125
☐ OM4 - Multimode 50/125

Fibre Cable Type:

- ☐ Tight buffered indoor/outdoor
☐ Loose tube underground cable
☐ Microcable

Where will the cable be installed?

- | | |
|----------------------------------|--------------------------------------|
| <input type="checkbox"/> Indoor | <input type="checkbox"/> Underground |
| <input type="checkbox"/> Outdoor | |

Core Count: _____ Length (metres): _____

Cable Drum

- ☐ Recommended for cables >50m

END B

Connector Type:

- | | |
|------------------------------|------------------------------|
| <input type="checkbox"/> ST | <input type="checkbox"/> FCA |
| <input type="checkbox"/> SC | <input type="checkbox"/> LC |
| <input type="checkbox"/> SCA | <input type="checkbox"/> LCA |
| <input type="checkbox"/> FC | |

Break Out Details:

- ☐ Staggered
☐ Parallel
☐ Over sleeving 1.8mm
☐ Over sleeving 3mm

*see diagram above

Hauling Options:

- ☐ Pulling conduit
☐ Standard flexi protection

*Send the completed form to your account manager or to sales@mssdatasolutions.com.au

Submit